


Technical Data Sheet (TDS):

Specifications			
Model:	ST-SXS08-1-BT	Power:	3W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	169 Lumen	Luminous Efficiency:	56 Lumen/W
Structure:	Adjustable angle	Beam Angle:	☐ 15° ☐ 24° ☐ 36°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K
Dimensions:	Ø 20*35mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ WH ☐ BK		

Photometric and Luminous Intensity Distribution Curve

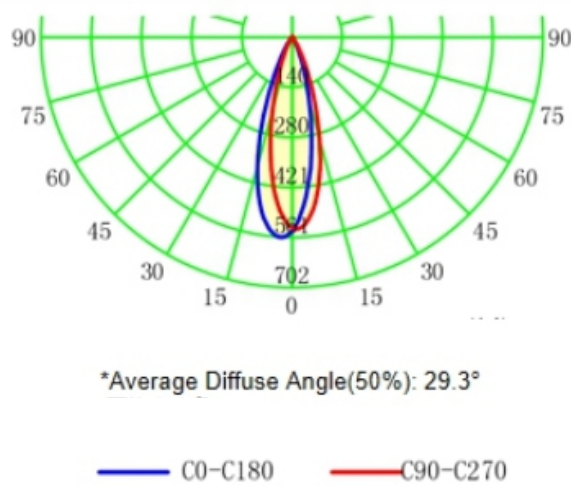

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	543.82	0.53/0.52	0.2	236.27
2.0	135.96	1.05/1.04	0.9	59.07
3.0	60.42	1.58/1.55	2.0	26.25
4.0	33.99	2.11/2.07	3.6	14.77
5.0	21.75	2.63/2.59	5.6	9.45

LED RoHS