


Technical Data Sheet (TDS):

Specifications			
Model:	ST-MN 01	Power:	4W
Light Source:	BridgeLux	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	281 Lumen	Luminous Efficiency:	70 Lumen/W
Structure:	Adjustable Angle	Beam Angle:	☐ 15° ☐ 24° ☐ 36°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 4000K ☐ 5700K
Dimensions:	Φ 55*39 mm	Cutout:	Φ 50 mm
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ WH		

Photometric and Luminous Intensity Distribution Curve

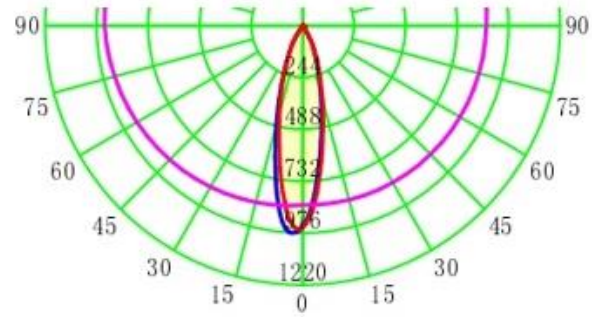

*Average Diffuse Angle(50%): 26.5°

— C0-C180 — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	947.88	0.45/0.45	0.2	418.79
2.0	236.97	0.90/0.90	0.7	104.70
3.0	105.32	1.35/1.35	1.5	46.53
4.0	59.24	1.81/1.79	2.6	26.17
5.0	37.92	2.26/2.24	4.1	16.75

LED   RoHS    

