


Technical Data Sheet (TDS):

Specifications

Model:	ST-JGSM403	Power:	10W
Light Source:	Luminus	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Built-in	Installation Method:	surface Mounted
Luminaire Luminous Flux:	362.3 Lumen	Luminous Efficiency:	60.3 Lumen/W
Structure:	Adjustable Angle	Beam Angle:	☐ 20° ☐ 25° ☐ 30° ☐ 60°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K
Dimensions:	/	Cutout:	/
Insulation Class:	Class 2	Optics Accessories:	—

Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512
Finish:	☐ WH ☐ BK ☐ WH+BK ☐ WH+GD ☐ BK+GD ☐ BH+CH

Photometric and Luminous Intensity Distribution Curve

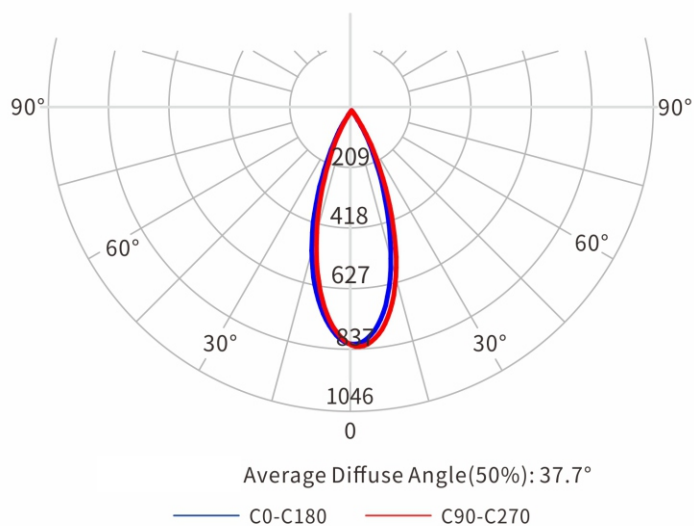

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	828.28	0.69/0.68	0.4	344.55
2.0	207.07	1.37/1.36	1.5	86.14
3.0	92.03	2.06/2.04	3.3	38.28
4.0	51.77	2.74/2.72	5.9	21.53
5.0	33.13	3.43/3.40	9.2	13.78