

Technical Data Sheet (TDS):


Specifications

Model:	ST-JGSM404	Power:	7W
Light Source:	Luminus	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Built-in	Installation Method:	surface Mounted
Luminaire Luminous Flux:	361.3 Lumen	Luminous Efficiency:	60.2 Lumen/W
Structure:	Fixed	Beam Angle:	<input type="checkbox"/> 20° <input type="checkbox"/> 25° <input type="checkbox"/> 30° <input type="checkbox"/> 60°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4000K
Dimensions:	/	Cutout:	/
Insulation Class:	Class 2	Optics Accessories:	—

Intelligent Control: (Non-Dim) (Triac) DALI 0-10V PWM DMX512

Finish: WH BK WH+BK WH+GD BK+GD BH+CH

Photometric and Luminous Intensity Distribution Curve

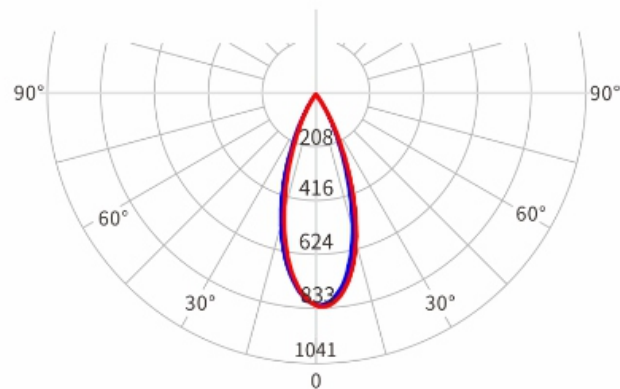

Average Diffuse Angle(50%): 37.7°

— C0-C180 — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	825.55	0.68/0.68	0.4	343.40
2.0	206.39	1.37/1.36	1.5	85.85
3.0	91.73	2.05/2.04	3.3	38.16
4.0	51.6	2.74/2.72	5.9	21.46
5.0	33.02	3.42/3.40	9.2	13.74