


Technical Data Sheet (TDS):

Specifications			
Model:	ST-JG-XQ02	Power:	5W
Light Source:	Luminus	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	283 Lumen	Luminous Efficiency:	56.6 Lumen/W
Structure:	Adjustable	Beam Angle:	☐ 10° ☐ 15° ☐ 24° ☐ 36° ☐ 10*45°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K
Dimensions:	44*44*80mm	Cutout:	/
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ WH ☐ BK ☐ WH+CH ☐ WH+BK ☐ WH+GD ☐ Bk+GD		

Photometric and Luminous Intensity Distribution Curve

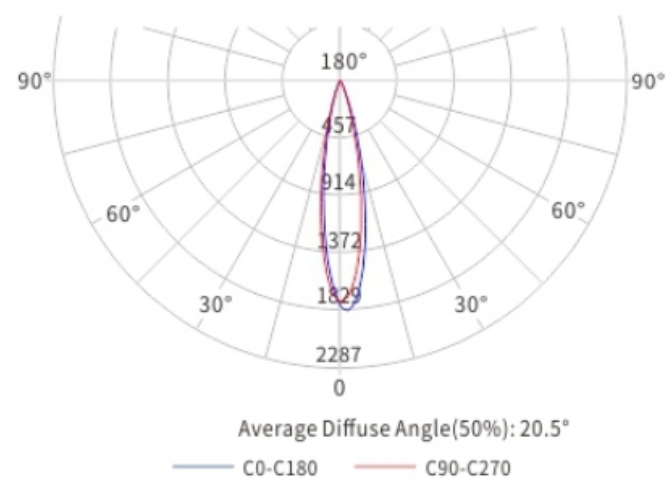

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1785.40	0.36/0.36	0.1	804.11
2.0	446.35	0.72/0.73	0.4	201.03
3.0	198.38	1.08/1.09	0.9	89.35
4.0	111.59	1.44/4.45	1.7	50.26
5.0	71.42	1.80/1.81	2.6	32.16

LED   RoHS    