


Technical Data Sheet (TDS):

Specifications			
Model:	ST-JG04A	Power:	18W
Light Source:	Bridgelux	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	1203 Lumen	Luminous Efficiency:	66 Lumen/W
Structure:	Adjustable	Beam Angle:	□24°
IP Rating:	IP 20	Colour Temperature:	□4000K
Dimensions:	Ø135*158mm	Cutout:	Ø125mm
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	□ (Non-Dim) □ (Triac) □ DALI □ 0-10V □ PWM □ DMX512		
Finish:	□ WH+CH		

Photometric and Luminous Intensity Distribution Curve

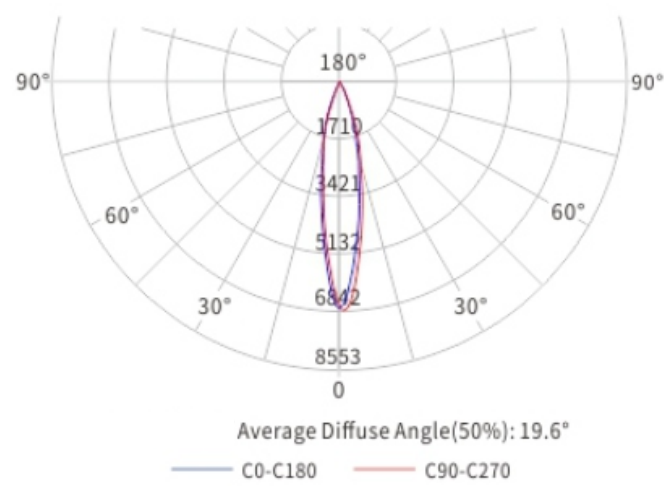

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	6684.18	0.34/0.35	0.1	3633.36
2.0	1671.05	0.69/0.69	0.4	908.34
3.0	742.69	1.03/1.04	0.9	403.71
4.0	417.76	1.38/1.38	1.5	227.09
5.0	267.37	1.72/1.74	2.4	145.33