


Technical Data Sheet (TDS):

Specifications			
Model:	ST-JG06	Power:	35W
Light Source:	Bridgelux	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	2626 Lumen	Luminous Efficiency:	75 Lumen/W
Structure:	Fixed	Beam Angle:	☐ 24° ☐ 45°
IP Rating:	IP 20	Colour Temperature:	☐ 3000K ☐ 4000K
Dimensions:	Ø185*195mm	Cutout:	Ø170mm
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ WH+CH		

Photometric and Luminous Intensity Distribution Curve

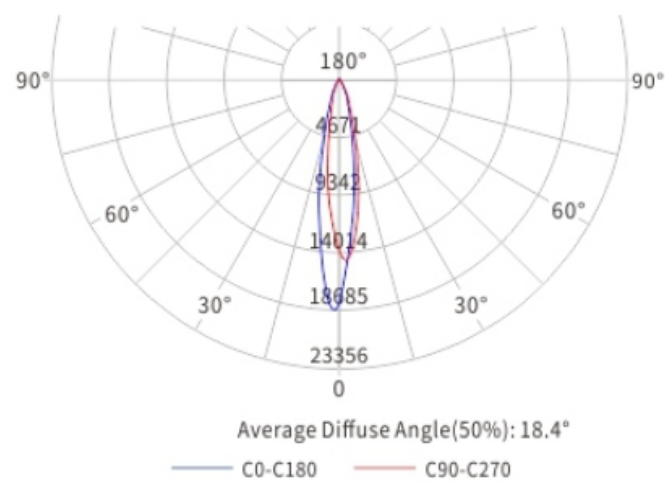

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	17842.06	0.31/0.34	0.1	9033.94
2.0	4460.52	0.62/0.68	0.3	2258.49
3.0	1982.45	0.93/1.02	0.8	1003.77
4.0	1115.13	1.24/1.35	1.4	564.62
5.0	713.68	1.55/1.69	2.2	361.36