


Technical Data Sheet (TDS):

Specifications			
Model:	ST-JG06A	Power:	35W
Light Source:	Bridgelux	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	2604 Lumen	Luminous Efficiency:	74 Lumen/W
Structure:	Adjustable	Beam Angle:	☐ 24° ☐ 45°
IP Rating:	IP 20	Colour Temperature:	☐ 3000K ☐ 4000K
Dimensions:	Ø185*195mm	Cutout:	Ø170mm
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ WH+CH		

Photometric and Luminous Intensity Distribution Curve

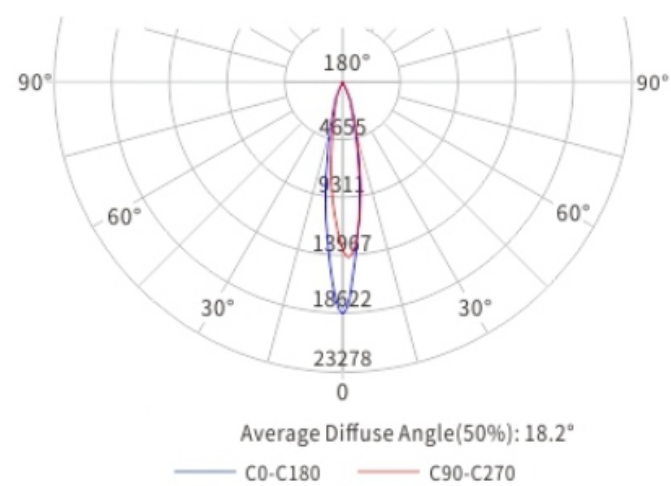

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	18622.79	0.33/0.34	0.1	8827.69
2.0	4655.70	0.60/0.68	0.4	2206.92
3.0	2069.20	0.91/1.02	0.8	980.85
4.0	1163.92	1.21/1.35	1.4	551.73
5.0	744.91	1.51/1.69	2.2	353.11