

Technical Data Sheet (TDS):


Specifications

Model:	ST-JG22	Power:	9W
Light Source:	Bridgelux	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	368 Lumen	Luminous Efficiency:	40 Lumen/W
Structure:	Adjustable	Beam Angle:	<input type="checkbox"/> 4° <input type="checkbox"/> 10° <input type="checkbox"/> 15° <input type="checkbox"/> 24° <input type="checkbox"/> 36°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4200K <input type="checkbox"/> 5700K
Dimensions:	Ø84*99mm	Cutout:	Ø75mm
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control: (Non-Dim) (Triac) DALI 0-10V PWM DMX512

Finish: WH BK WH+CH WH+BK WH+GD Bk+GD

Photometric and Luminous Intensity Distribution Curve

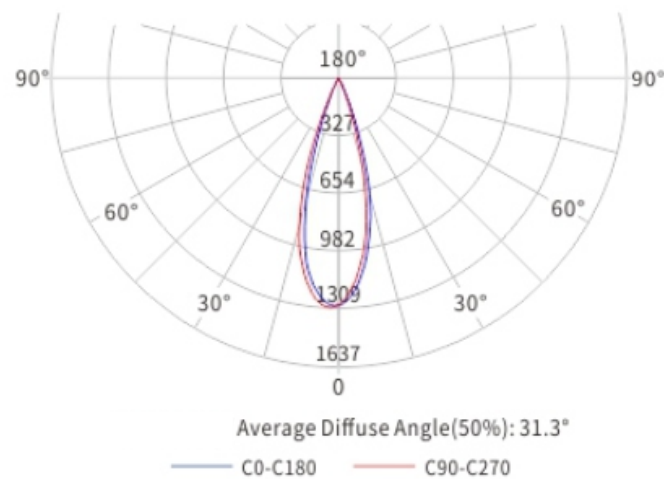

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1297.67	0.56/0.56	0.3	875.66
2.0	324.42	1.12/1.12	1.0	218.91
3.0	144.19	1.68/1.68	2.3	97.30
4.0	81.10	2.24/2.24	4.0	54.73
5.0	51.91	2.80/2.80	6.3	35.03

LED © CE RoHS CCC ▼ □ ↗