

Technical Data Sheet (TDS):


Specifications

Model:	ST-DJ05A	Power:	2W
Light Source:	CREE XPE	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	/	Installation Method:	EMBEDMENT SLEEVE
Luminaire Luminous Flux:	7 Lumen	Luminous Efficiency:	41 Lumen/W
Structure:	Fixed	Beam Angle:	/
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K
Dimensions:	184*32*36mm	Cutout:	170*22mm
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control: (Non-Dim) (Triac) DALI 0-10V PWM DMX512

Finish: WH BK

Photometric and Luminous Intensity Distribution Curve

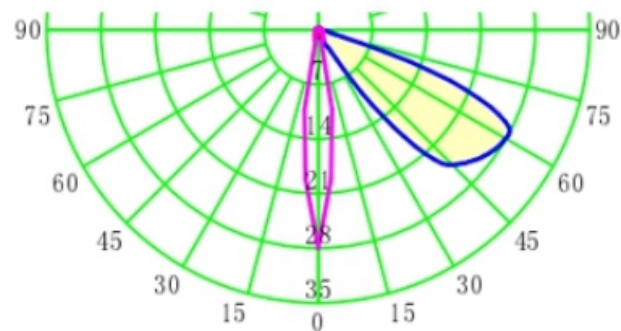

*Average Diffuse Angle(50%): 29.6°

— C0-C180 — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.09	1.41/3.18	22.4	0.12
2.0	0.02	2.82/6.36	89.6	0.03
3.0	0.01	4.24/9.54	201.6	0.01
4.0	0.01	5.65/12.72	358.4	0.01
5.0	0.00	7.06/15.90	559.9	0.00

LED RoHS