


Technical Data Sheet (TDS):

Specifications

Model:	ST-XX-DC402-2000	Power:	/
Light Source:	/	Input Voltage:	/
Colour Rendering Index:	/	Main Material:	Aluminium+PC
Driver:	/	Installation Method:	Pre-embedded
Luminaire Luminous Flux:	/	Luminous Efficiency:	Lumen/W
Structure:	Fixed	Beam Angle:	—
IP Rating:	IP 20	Colour Temperature:	—
Dimensions:	L:2000mm W:10mm	Cutout:	—
Insulation Class:	/	Optics Accessories:	—
Illustrate:	Applied to ceiling corner line,arc structure,oblique lighting slot.		
Intelligent Control:	<input type="checkbox"/> (Non-Dim) <input type="checkbox"/> (Triac) <input type="checkbox"/> DALI <input type="checkbox"/> 0-10V <input type="checkbox"/> PWM <input type="checkbox"/> DMX512		
Finish:	<input type="checkbox"/> WH		

Photometric and Luminous Intensity Distribution Curve

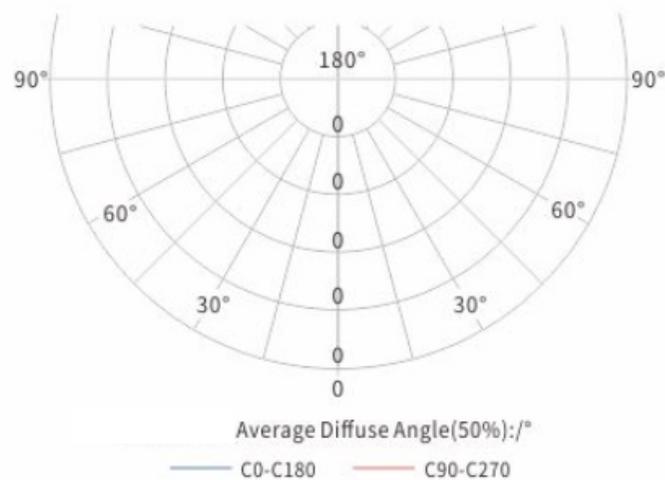

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	/	/	0.1	/
2.0	/	/	0.5	/
3.0	/	/	1.1	/
4.0	/	/	1.9	/
5.0	/	/	3.0	/

LED