


Technical Data Sheet (TDS):

Specifications

Model:	STB183-5000	Power:	4.8W/6W
Light Source:	2835	Input Voltage:	DC24V
Colour Rendering Index:	Ra≥90	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Surface Mounted
Luminaire Luminous Flux:	Lumen	Luminous Efficiency:	Lumen/W
Structure:	Fixed	Beam Angle:	—
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4000K <input type="checkbox"/> 5700K
Dimensions:	5m	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	<input type="checkbox"/> (Non-Dim) <input type="checkbox"/> (Triac) <input type="checkbox"/> DALI <input type="checkbox"/> 0-10V <input type="checkbox"/> PWM <input type="checkbox"/> DMX512		
Finish:	/		

Photometric and Luminous Intensity Distribution Curve

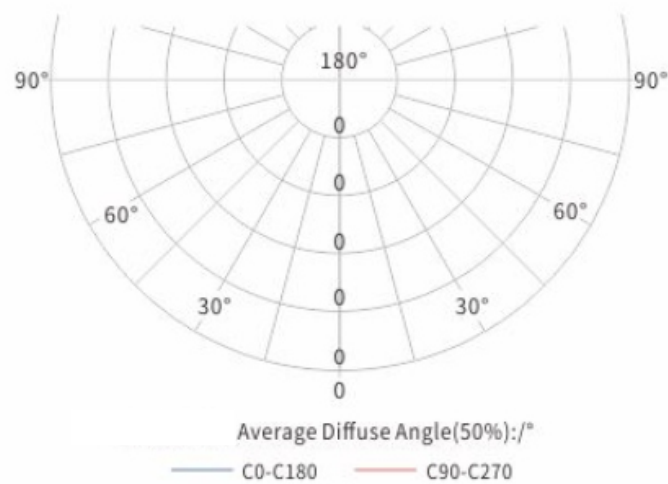

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	/	/	0.1	/
2.0	/	/	0.5	/
3.0	/	/	1.1	/
4.0	/	/	1.9	/
5.0	/	/	3.0	/

LED