

Technical Data Sheet (TDS):


Specifications

Model:	ST-ZSQ03-600	Power:	40-20W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	2913 Lumen	Luminous Efficiency:	58 Lumen/W
Structure:	Fixed	Beam Angle:	<input type="checkbox"/> 120°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 3000K
Dimensions:	Ø605*56mm	Cutout:	Ø610mm
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control: (Non-Dim) (Triac) DALI 0-10V PWM DMX512

Finish: WH

Photometric and Luminous Intensity Distribution Curve

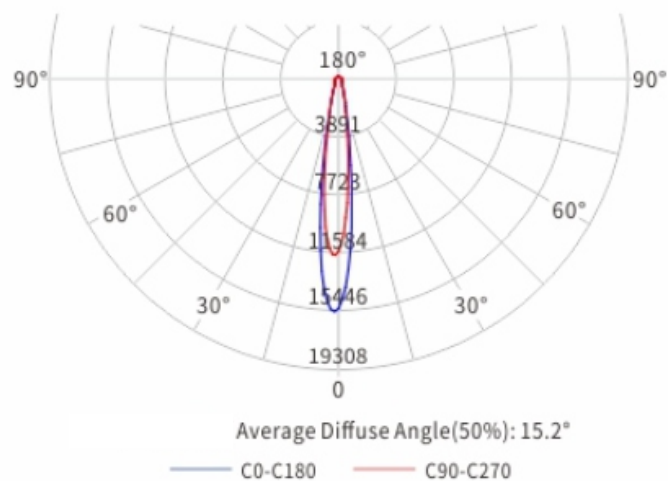

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	15268.34	0.26/0.27	0.1	6464.06
2.0	3817.08	0.53/0.54	0.2	1616.92
3.0	1696.48	0.79/0.80	0.5	718.23
4.0	954.27	1.06/1.07	0.9	404.00
5.0	610.73	1.32/1.34	1.4	258.56