

## Technical Data Sheet (TDS):


### Specifications

Model:	ST-FS07-1200	Power:	5W
Light Source:	Bridgelux	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Surface Mounted
Luminaire Luminous Flux:	208 Lumen	Luminous Efficiency:	52 Lumen/W
Structure:	Fixed	Beam Angle:	<input type="checkbox"/> 30°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 3000K
Dimensions:	30*H1200mm	Cutout:	/
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control:  (Non-Dim)  (Triac)  DALI  0-10V  PWM  DMX512

Finish:  BK

### Photometric and Luminous Intensity Distribution Curve

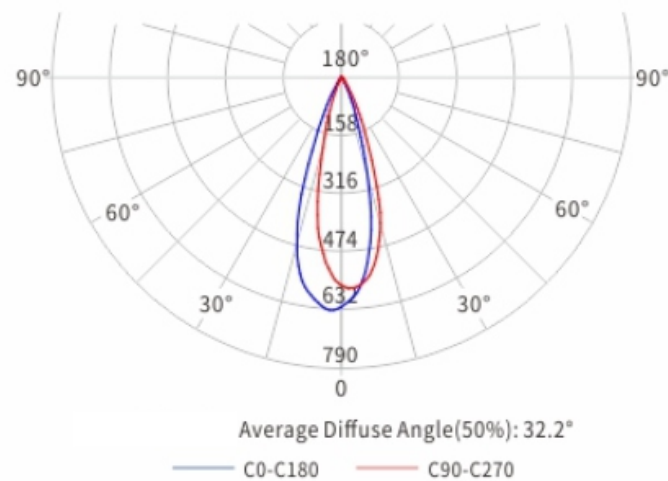

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	622.19	0.60/0.56	0.3	256.91
2.0	155.55	1.19/1.12	1.1	64.23
3.0	69.13	1.79/1.67	2.4	28.55
4.0	38.89	2.39/2.23	4.3	16.06
5.0	24.89	2.98/2.79	6.7	10.28