


## Technical Data Sheet (TDS):

### Specifications

Model:	ST-RZY25	Power:	5W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	388 Lumen	Luminous Efficiency:	67 Lumen/W
Structure:	Fixed	Beam Angle:	<input type="checkbox"/> 120°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5700K
Dimensions:	Ø96*58mm	Cutout:	Ø75mm
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	<input type="checkbox"/> (Non-Dim) <input type="checkbox"/> (Triac) <input type="checkbox"/> DALI <input type="checkbox"/> 0-10V <input type="checkbox"/> PWM <input type="checkbox"/> DMX512		
Finish:	<input type="checkbox"/> WH <input type="checkbox"/> HL		

### Photometric and Luminous Intensity Distribution Curve

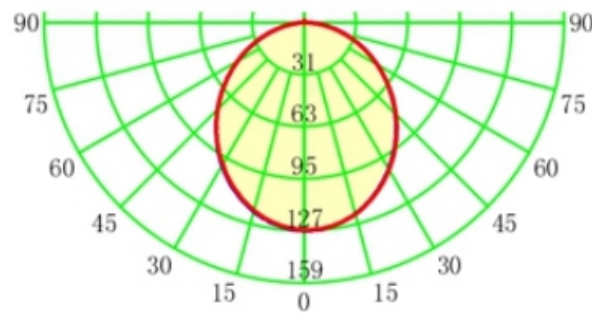

\*Average Diffuse Angle(50%): 106.9°

— C0-C180    — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	127.32	2.59/2.61	5.3	25.88
2.0	31.83	5.18/5.22	21.3	6.47
3.0	14.15	7.77/7.83	48.0	2.88
4.0	7.96	10.36/10.44	85.3	1.62
5.0	5.09	12.95/13.05	133.3	1.04

LED RoHS