


## Technical Data Sheet (TDS):

### Specifications

Model:	ST-RZY30	Power:	6W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	397.4 Lumen	Luminous Efficiency:	66 Lumen/W
Structure:	Fixed	Beam Angle:	<input type="checkbox"/> 120°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5700K
Dimensions:	Ø105*58mm	Cutout:	Ø90mm
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	<input type="checkbox"/> (Non-Dim) <input type="checkbox"/> (Triac) <input type="checkbox"/> DALI <input type="checkbox"/> 0-10V <input type="checkbox"/> PWM <input type="checkbox"/> DMX512		
Finish:	<input type="checkbox"/> WH <input type="checkbox"/> HL		

### Photometric and Luminous Intensity Distribution Curve

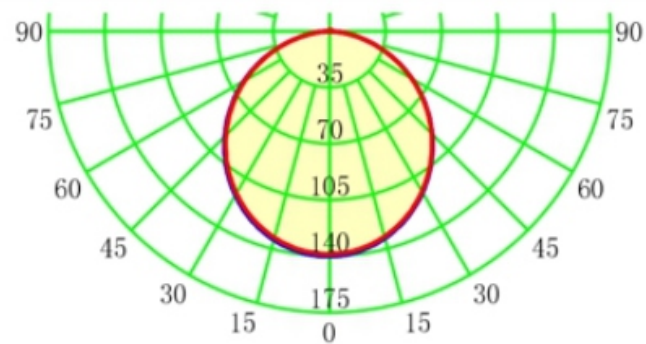

\*Average\_Diffuse Angle(50%): 111.3°

— C0-C180    — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	140.59	2.93/2.93	6.7	25.03
2.0	35.15	5.85/5.85	26.9	6.26
3.0	15.62	8.78/8.78	42.1	2.78
4.0	8.79	11.71/11.70	107.7	1.56
5.0	5.62	14.63/14.63	168.2	1.00

LED RoHS