


Technical Data Sheet (TDS):

Specifications

Model:	ST-RZY80	Power:	24W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	1548 Lumen	Luminous Efficiency:	64 Lumen/W
Structure:	Fixed	Beam Angle:	<input type="checkbox"/> 120°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5700K
Dimensions:	Ø231*51mm	Cutout:	Ø210mm
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	<input type="checkbox"/> (Non-Dim) <input type="checkbox"/> (Triac) <input type="checkbox"/> DALI <input type="checkbox"/> 0-10V <input type="checkbox"/> PWM <input type="checkbox"/> DMX512		
Finish:	<input type="checkbox"/> WH		

Photometric and Luminous Intensity Distribution Curve

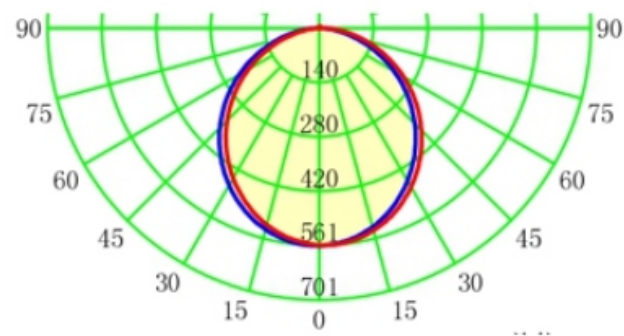

*Average Diffuse Angle(50%): 108.5°

— C0-C180 — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	561.26	2.78/2.78	6.1	105.61
2.0	140.32	5.56/5.56	24.5	26.40
3.0	62.36	7.02/8.33	55.1	11.73
4.0	35.08	11.13/11.11	97.9	6.60
5.0	22.45	13.91/13.89	153.0	4.22

LED RoHS