

Technical Data Sheet (TDS):


Specifications

Model:	SLD6A01	Power:	6W
Light Source:	Samsung	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	347 Lumen	Luminous Efficiency:	57 Lumen/W
Structure:	Adjustable angle	Beam Angle:	□120°
IP Rating:	IP 20	Colour Temperature:	□2700K □3000K □4200K □5700K
Dimensions:	Ø102*71mm	Cutout:	Ø75mm
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control: ☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512

Finish: ☐ WH ☐ SL

Photometric and Luminous Intensity Distribution Curve

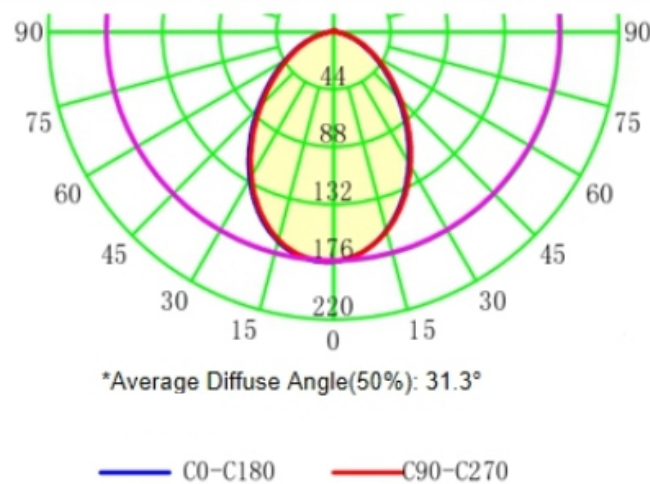

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	176.30	1.74/1.75	2.4	51.20
2.0	44.08	3.49/3.49	9.6	12.80
3.0	19.59	5.23/5.24	21.7	5.69
4.0	11.02	0.93/0.91	38.5	3.20
5.0	7.05	8.72/8.74	60.2	2.05

LED CCC CE RoHS CQC F