


Technical Data Sheet (TDS):

Specifications			
Model:	SLD30A02	Power:	17W
Light Source:	Samsung	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	530 Lumen	Luminous Efficiency:	31 Lumen/W
Structure:	Adjustable angle	Beam Angle:	☐ 120°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 4200K ☐ 5700K
Dimensions:	Ø146*85mm	Cutout:	Ø135mm
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ WH		

Photometric and Luminous Intensity Distribution Curve

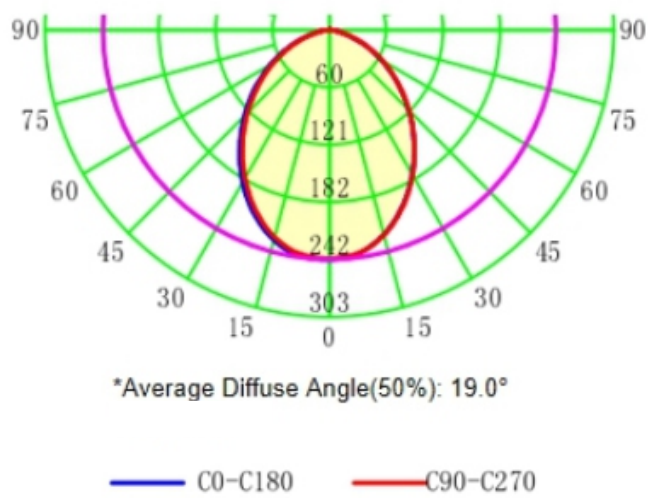

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	242.92	2.05/2.02	3.3	62.70
2.0	60.73	4.10/4.04	13.0	15.68
3.0	26.99	6.15/6.06	29.3	6.97
4.0	15.18	8.19/8.08	52.1	3.92
5.0	9.72	10.24/10.11	81.4	2.51

LED   RoHS    