

Technical Data Sheet (TDS):


Specifications

Model:	ST-T5F600	Power:	6W
Light Source:	2835	Input Voltage:	DC24V
Colour Rendering Index:	Ra≥90	Main Material:	Aluminium+PC
Driver:	Remote	Installation Method:	Open-mounted
Luminaire Luminous Flux:	612 Lumen	Luminous Efficiency:	102 Lumen/W
Structure:	Fixed	Beam Angle:	<input type="checkbox"/> 120°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4200K <input type="checkbox"/> 5700K
Dimensions:	585*22*33mm	Cutout:	/
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control: (Non-Dim) (Triac) DALI 0-10V PWM DMX512

Finish: SG

Photometric and Luminous Intensity Distribution Curve

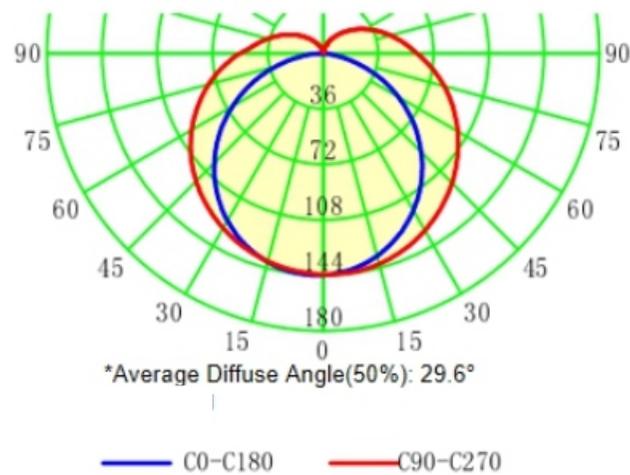

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	144.29	2.96/11.91	47.3	5.06
2.0	36.07	5.92/23.82	189.1	1.27
3.0	16.03	8.87/35.72	425.4	0.56
4.0	9.02	11.83/47.63	756.3	0.32
5.0	5.77	14.79/59.54	1181.6	0.20

LED RoHS