

Technical Data Sheet (TDS):


Specifications

Model:	ST-LS32	Power:	10W
Light Source:	Bridgelux	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	703 Lumen	Luminous Efficiency:	70 Lumen/W
Structure:	Adjustable	Beam Angle:	<input type="checkbox"/> 4° <input type="checkbox"/> 10° <input type="checkbox"/> 15° <input type="checkbox"/> 24° <input type="checkbox"/> 36°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4200K <input type="checkbox"/> 5700K
Dimensions:	Ø85*75mm	Cutout:	Ø75mm
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control: (Non-Dim) (Triac) DALI 0-10V PWM DMX512

Finish: WH WH+BK WH+GD

Photometric and Luminous Intensity Distribution Curve

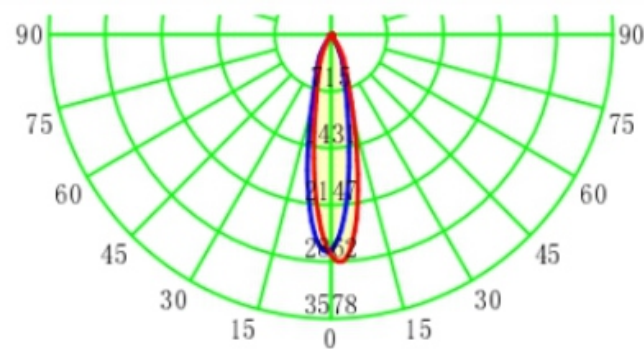

*Average Diffuse Angle(50%): 31.3°

— C0-C180 — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2714.82	0.39/0.39	0.1	1484.45
2.0	678.71	0.78/0.78	0.5	371.11
3.0	301.65	1.17/1.16	1.1	164.94
4.0	169.68	1.56/1.55	2.0	92.78
5.0	108.59	1.94/1.94	3.1	59.38

LED RoHS