


Technical Data Sheet (TDS):

Specifications			
Model:	ST-SXS06-6	Power:	9W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	766 Lumen	Luminous Efficiency:	85 Lumen/W
Structure:	Fixed	Beam Angle:	☐ 15° ☐ 24° ☐ 36°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 4000K
Dimensions:	260*14*25mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ BK		

Photometric and Luminous Intensity Distribution Curve

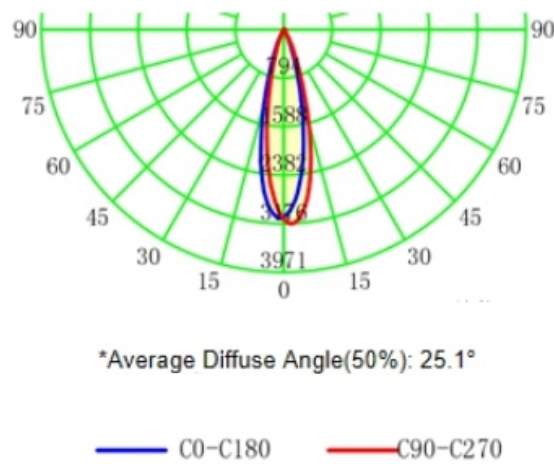

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3068.81	0.45/0.44	0.2	1560.17
2.0	767.20	0.89/0.89	0.6	390.04
3.0	340.98	1.34/1.33	1.5	173.35
4.0	191.80	1.79/1.78	2.6	97.51
5.0	122.75	2.24/2.22	4.0	62.41

LED   RoHS    