


## Technical Data Sheet (TDS):

### Specifications

Model:	ST-SXF01-600	Power:	10W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	696 Lumen	Luminous Efficiency:	69 Lumen/W
Structure:	Fixed	Beam Angle:	120°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4000K
Dimensions:	600*14*25mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	<input type="checkbox"/> (Non-Dim) <input type="checkbox"/> (Triac) <input type="checkbox"/> DALI <input type="checkbox"/> 0-10V <input type="checkbox"/> PWM <input type="checkbox"/> DMX512		
Finish:	<input type="checkbox"/> BK		

### Photometric and Luminous Intensity Distribution Curve

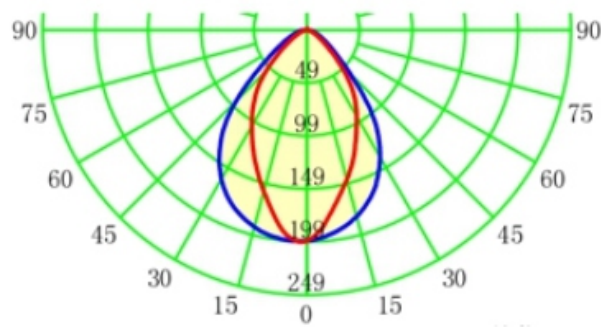

\*Average Diffuse Angle(50%): 103.3°

— C0-C180    — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	274.75	2.71/2.36	5.1	54.57
2.0	68.69	5.43/4.71	20.4	13.64
3.0	30.53	8.14/7.07	45.9	6.06
4.0	17.17	10.85/9.42	81.6	3.41
5.0	10.99	13.57/11.78	127.5	2.18

LED RoHS