


Technical Data Sheet (TDS):

Specifications			
Model:	ST-SXS03	Power:	9W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	526 Lumen	Luminous Efficiency:	58 Lumen/W
Structure:	Adjustable angle	Beam Angle:	□24°
IP Rating:	IP 20	Colour Temperature:	□2700K □3000K □3500K □4000K
Dimensions:	200*14*90mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	□ (Non-Dim) □ (Triac) □ DALI □ 0-10V □ PWM □ DMX512		
Finish:	□ BK		

Photometric and Luminous Intensity Distribution Curve

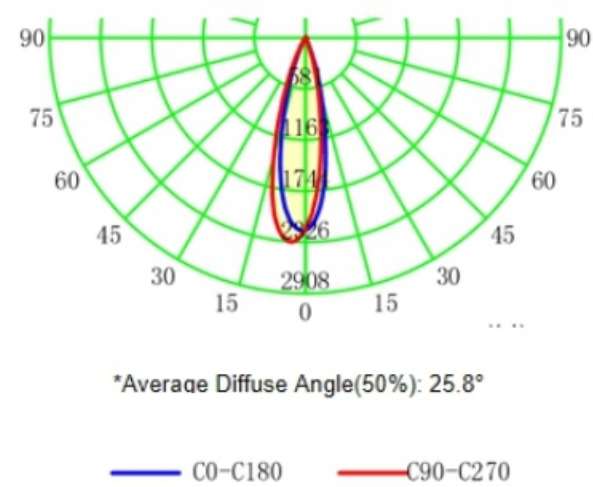

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2189.22	0.46/0.45	0.2	987.64
2.0	547.30	0.92/0.91	0.7	246.91
3.0	243.25	1.39/1.36	1.6	109.74
4.0	136.83	1.85/1.81	2.8	61.73
5.0	87.57	2.31/2.26	4.3	39.51

LED   RoHS    