

Technical Data Sheet (TDS):


Specifications

Model:	ST-SXS04-1	Power:	3W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	169 Lumen	Luminous Efficiency:	56 Lumen/W
Structure:	Adjustable angle	Beam Angle:	☐ 15° ☐ 24° ☐ 36°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K
Dimensions:	33.5*65mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control: ☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512

Finish: ☐ BK ☐ WH+BK

Photometric and Luminous Intensity Distribution Curve

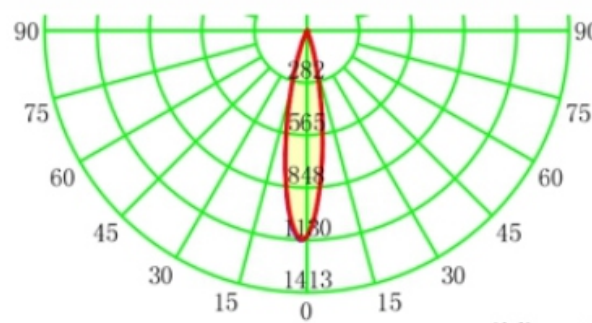

*Average Diffuse Angle(50%): 20.2°

— C0-C180 — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1113.86	0.36/0.36	0.1	506.10
2.0	278.46	0.71/0.71	0.4	126.52
3.0	123.76	1.07/1.07	0.9	56.23
4.0	69.62	1.42/1.42	1.6	31.63
5.0	44.55	1.78/1.78	2.5	20.24

LED   RoHS    