


Technical Data Sheet (TDS):

Specifications			
Model:	ST-SXS08-1	Power:	3W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	169 Lumen	Luminous Efficiency:	56 Lumen/W
Structure:	Adjustable angle	Beam Angle:	☐ 15° ☐ 24° ☐ 36°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K
Dimensions:	Ø 20*35mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control: ☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512			
Finish: ☐ WH ☐ BK			

Photometric and Luminous Intensity Distribution Curve

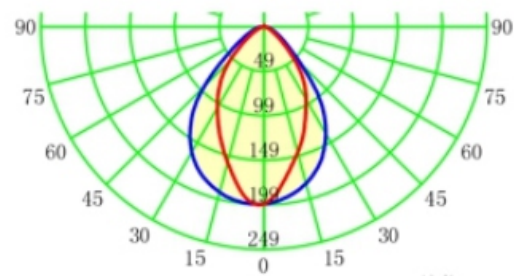

*Average Diffuse Angle(50%): 71.0°

— C0-C180 — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	198.64	1.75/1.15	1.7	64.49
2.0	49.66	3.50/2.30	6.7	16.12
3.0	22.07	5.25/3.44	15.1	7.17
4.0	12.41	7.00/4.59	26.8	4.03
5.0	7.95	8.75/5.74	41.9	2.58

LED   RoHS    