

Technical Data Sheet (TDS):


Specifications

Model:	ST-SXS06-3-BT	Power:	6W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	356 Lumen	Luminous Efficiency:	59 Lumen/W
Structure:	Fixed	Beam Angle:	<input type="checkbox"/> 15° <input type="checkbox"/> 24° <input type="checkbox"/> 36°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K
Dimensions:	220*14*25mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control: (Non-Dim) (Triac) DALI 0-10V PWM DMX512

Finish: BK

Photometric and Luminous Intensity Distribution Curve

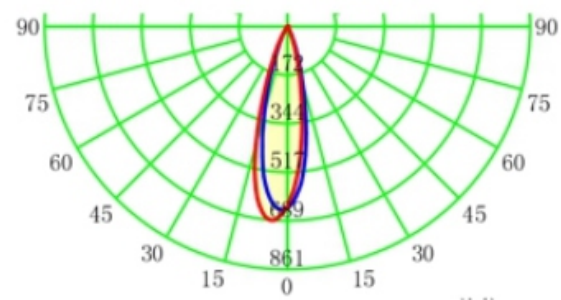

*Average Diffuse Angle(50%): 26.1°

— C0-C180 — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	643.52	0.47/0.46	0.2	291.67
2.0	160.88	0.94/0.94	0.7	72.92
3.0	71.50	1.41/1.37	1.6	32.41
4.0	40.22	1.87/1.83	2.9	18.23
5.0	25.74	2.34/2.29	4.5	11.67

LED RoHS