

## Technical Data Sheet (TDS):


### Specifications

Model:	ST-SXS06-1-BT	Power:	3W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	170 Lumen	Luminous Efficiency:	56 Lumen/W
Structure:	Fixed	Beam Angle:	<input type="checkbox"/> 15° <input type="checkbox"/> 24° <input type="checkbox"/> 36°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K
Dimensions:	110*14*25mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control:  (Non-Dim)  (Triac)  DALI  0-10V  PWM  DMX512

Finish:  BK

### Photometric and Luminous Intensity Distribution Curve

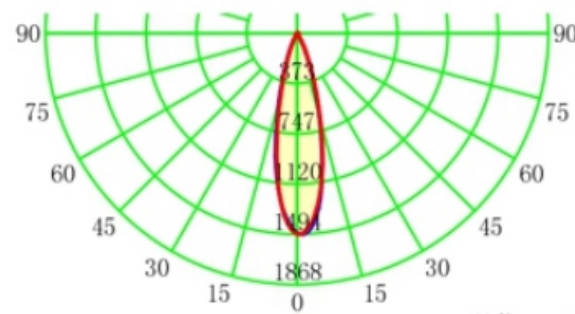

\*Average Diffuse Angle(50%): 25.7°

— C0-C180 — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1484.70	0.46/0.45	0.2	649.43
2.0	371.17	0.92/0.91	0.7	162.36
3.0	164.97	1.38/1.36	1.5	72.16
4.0	92.79	1.83/1.81	2.6	40.59
5.0	59.39	2.29/2.27	4.1	25.98

LED RoHS