

## Technical Data Sheet (TDS):


### Specifications

Model:	ST-SXS02-BT	Power:	9W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	543 Lumen	Luminous Efficiency:	60 Lumen/W
Structure:	Adjustable angle	Beam Angle:	<input type="checkbox"/> 120°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K
Dimensions:	200*14*90mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control:  (Non-Dim)  (Triac)  DALI  0-10V  PWM  DMX512

Finish:  BK

### Photometric and Luminous Intensity Distribution Curve

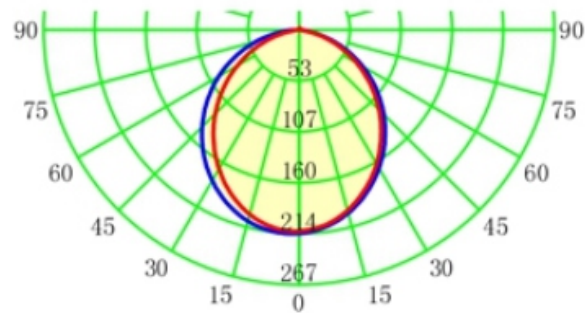

\*Average Diffuse Angle(50%): 103.8°

— C0-C180    — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	213.74	2.75/2.37	5.2	41.93
2.0	53.44	5.50/4.74	20.6	10.48
3.0	23.75	10.99/9.49	46.4	4.66
4.0	13.36	10.99/9.49	82.4	2.62
5.0	8.55	13.74/11.86	128.8	1.68

LED RoHS