


Technical Data Sheet (TDS):

Specifications

Model:	ST-SXS07-1-BT	Power:	9W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	780 Lumen	Luminous Efficiency:	86 Lumen/W
Structure:	Adjustable angle	Beam Angle:	<input type="checkbox"/> 15° <input type="checkbox"/> 24° <input type="checkbox"/> 36°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4000K
Dimensions:	Ø52*130mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	<input type="checkbox"/> (Non-Dim) <input type="checkbox"/> (Triac) <input type="checkbox"/> DALI <input type="checkbox"/> 0-10V <input type="checkbox"/> PWM <input type="checkbox"/> DMX512		
Finish:	<input type="checkbox"/> WH+Bk <input type="checkbox"/> BK		

Photometric and Luminous Intensity Distribution Curve

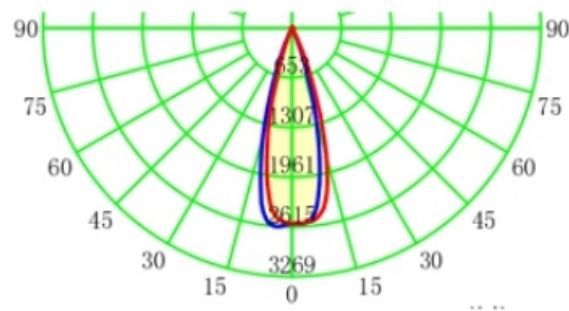

*Average Diffuse Angle(50%): 30.8°

— C0-C180 — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2574.68	0.54/0.56	0.2	1104.94
2.0	643.67	1.09/1.12	1.0	276.24
3.0	286.08	1.63/1.67	2.2	122.77
4.0	160.92	2.17/2.23	3.9	69.06
5.0	102.99	2.72/2.79	6.0	44.20

LED RoHS