


Technical Data Sheet (TDS):

Specifications			
Model:	ST-T5T1200	Power:	16W
Light Source:	2835	Input Voltage:	DC24V
Colour Rendering Index:	Ra≥90	Main Material:	Aluminium+PC
Driver:	Remote	Installation Method:	Open-mounted
Luminaire Luminous Flux:	1185 Lumen	Luminous Efficiency:	74 Lumen/W
Structure:	Fixed	Beam Angle:	☐ 120°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 4200K ☐ 5700K
Dimensions:	1185*22*33mm	Cutout:	/
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ SG		

Photometric and Luminous Intensity Distribution Curve

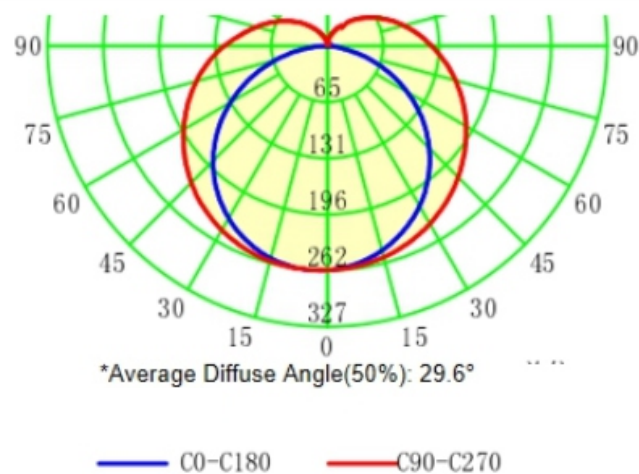

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	261.55	3.12/28.59	203.6	2.28
2.0	65.39	6.24/57.19	814.5	0.57
3.0	29.06	9.36/85.78	1832.6	0.25
4.0	16.35	12.48/114.38	3257.9	0.14
5.0	10.46	15.60/142.97	5090.5	0.09

LED   RoHS    