

Technical Data Sheet (TDS):


Specifications

Model:	ST-JGSQ602W	Power:	9W
Light Source:	Luminus	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Trimless
Luminaire Luminous Flux:	600.4 Lumen	Luminous Efficiency:	60.04 Lumen/W
Structure:	Adjustable angle	Beam Angle:	☐ 20° ☐ 25° ☐ 30° ☐ 60°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K
Dimensions:	/	Cutout:	145*65mm
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control: ☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512

Finish: ☐ WH ☐ BK ☐ WH+BK ☐ WH+GD ☐ BK+GD ☐ BH+CH

Photometric and Luminous Intensity Distribution Curve

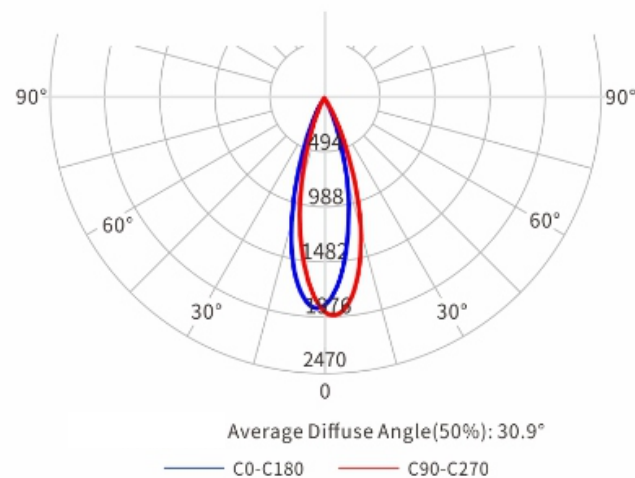

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1890.73	0.54/0.56	0.2	826.99
2.0	472.68	1.09/1.12	1.0	206.75
3.0	210.08	1.63/1.69	2.2	91.89
4.0	118.17	2.18/2.25	3.9	51.69
5.0	75.63	2.72/2.81	6.1	33.08