

Technical Data Sheet (TDS):


Specifications

Model:	ST-JG32	Power:	12*2W
Light Source:	Bridgelux	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	1183 Lumen	Luminous Efficiency:	49 Lumen/W
Structure:	Adjustable angle	Beam Angle:	<input type="checkbox"/> 15° <input type="checkbox"/> 24° <input type="checkbox"/> 36°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4200K <input type="checkbox"/> 5700K
Dimensions:	173*93*130mm	Cutout:	162*82mm
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control: (Non-Dim) (Triac) DALI 0-10V PWM DMX512

Finish: WH BK WH+BK WH+GD Bk+GD

Photometric and Luminous Intensity Distribution Curve

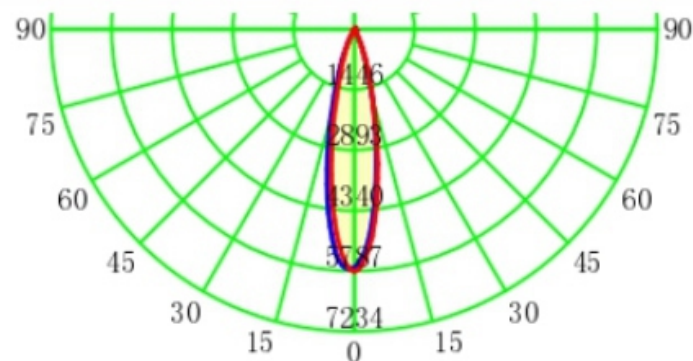

*Average Diffuse Angle(50%): 22.5°

— C0-C180 — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	5700.66	0.41/0.39	0.1	3025.27
2.0	1425.17	0.82/0.77	0.5	756.32
3.0	633.41	1.24/1.16	1.1	336.14
4.0	356.29	1.65/1.54	2.0	189.08
5.0	228.03	2.06/1.93	3.1	121.01

LED RoHS