


Technical Data Sheet (TDS):

Specifications			
Model:	ST-XMZ03	Power:	9W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	613 Lumen	Luminous Efficiency:	68 Lumen/W
Structure:	Fixed	Beam Angle:	/
IP Rating:	IP 20	Colour Temperature:	☐ 3000K
Dimensions:	Ø140*38*138mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ WH ☐ BK ☐ DR ☐ HO ☐ RG		

Photometric and Luminous Intensity Distribution Curve

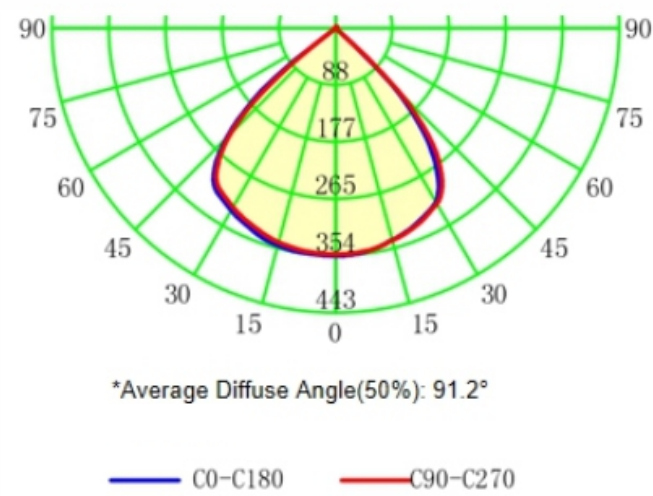

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	354.56	2.04/2.04	3.3	90.21
2.0	88.64	4.08/4.09	13.3	22.55
3.0	39.40	6.11/6.13	29.9	10.02
4.0	22.16	8.15/8.18	53.1	5.64
5.0	14.18	10.19/10.22	83.0	3.61